


FEATURES	
Technology	PM (Power Meter)
Energy Metering	Voltage(V), Current(A), Active Power(kW), Power Factor, kWh
Metering per Input Line	Yes (Branch Circuit and Total Current) Accuracy 1.5%
Metering per Output Receptacle	No
Remote Outlet Switching	No
Ethernet Port	No
Networking Protocols	No
PDU Cascading	No
Power Share	No
Display	4 Digital-7 Segment Display LED
Residual Current Monitoring	No
USB Ports	No
Environmental Sensors	No
INPUT	
Plug	IEC 60309 1P+N+E 6h 32A 250V SINGLE PHASE
Lead Length	3 meter
Cable Type	H07RN-F3G4.0 mm ²
Max. Input Load	32A
Rated Input Voltage	190-250V Single phase
Frequency	50-60Hz
Power Capacity	7360W
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	12 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	(2) 1 Pole Carling 16A L Series L31-X1-00-882-H12-D3
CHASSIS	
Dimensions (W x D x H)	812 x 55 x 55.4 mm
Color	RAL 9004 black powder coat
Mounting Options	4 mounting options (see page 2)
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf-cm or 22.4 in-lbs)
OPERATING ENVIRONMENT	
Temperature Range	0° to 60° C (30° to 140° F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
IEC 62368-1 (Third Edition)	
   	












C13 Lock Part




VIEW A

Toolless Mounting Buttons with Removable 90° Rotation Brackets




Chassis Color	Code
Black	Standard color
White	W
Red	R
Blue	A
Green	G
Orange	O
Grey	GY
Yellow	Y

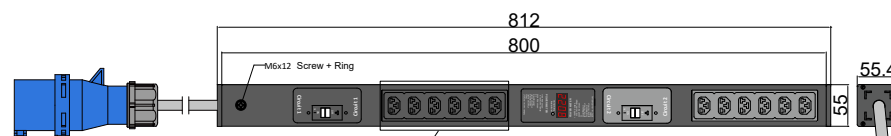 $\angle_{\text{VIEW A}}$ 

VIEW F

3 x M5 nut (multiposition fixing centres)

VIEW B:

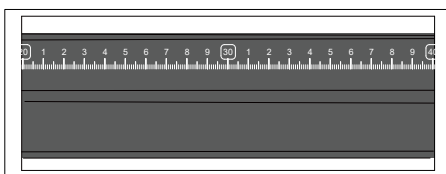

Packing content:

IEX Lock-VP



X12 (black, grey)

Basic Series (1)Power Meter	OUTPUT (6) IEX (C13/C19) combo Black (Max rate 16A) (6) IEX (C13/C19) combo Grey (Max rate 16A)	OPERATING TEMPERATURE 0° to 60°C			(NO PERMISSION.NO CHANGING)		Housing	Aluminium
					unit=mm			Black Powder Coating
		TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE		RAL9004				
		Revisions						
	Rev	Description	Date	FILLET	R0.5			
				ANGLE	±0.5°			
INPUT 190-250VAC 32A 50HZ IEC60309 32A 1P+N+E Plug 3m H07RN-F3G4.0mm² Power Lead	BRANCH CIRCUITS (2) 1 Pole Carling 16A L Series L31-B0-24-G16-H12-D3	MOUNTING ACCESORIES (2) Toolless Button (2) Toolless Mounting Bracket (2) Removable Mounting Brackets (2) Toolless Mounting Buttons with Removable 90° Rotation Brackets			FIRST ANGLE			
								
					DATE 02-02-2022			

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



C14 - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C14PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C20PLOCK - C19 Sleeve

H05VV-F3G1,5 mm²


Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓




C20PLOCK - C13 Sleeve

H05VV-F3G1 mm²


Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

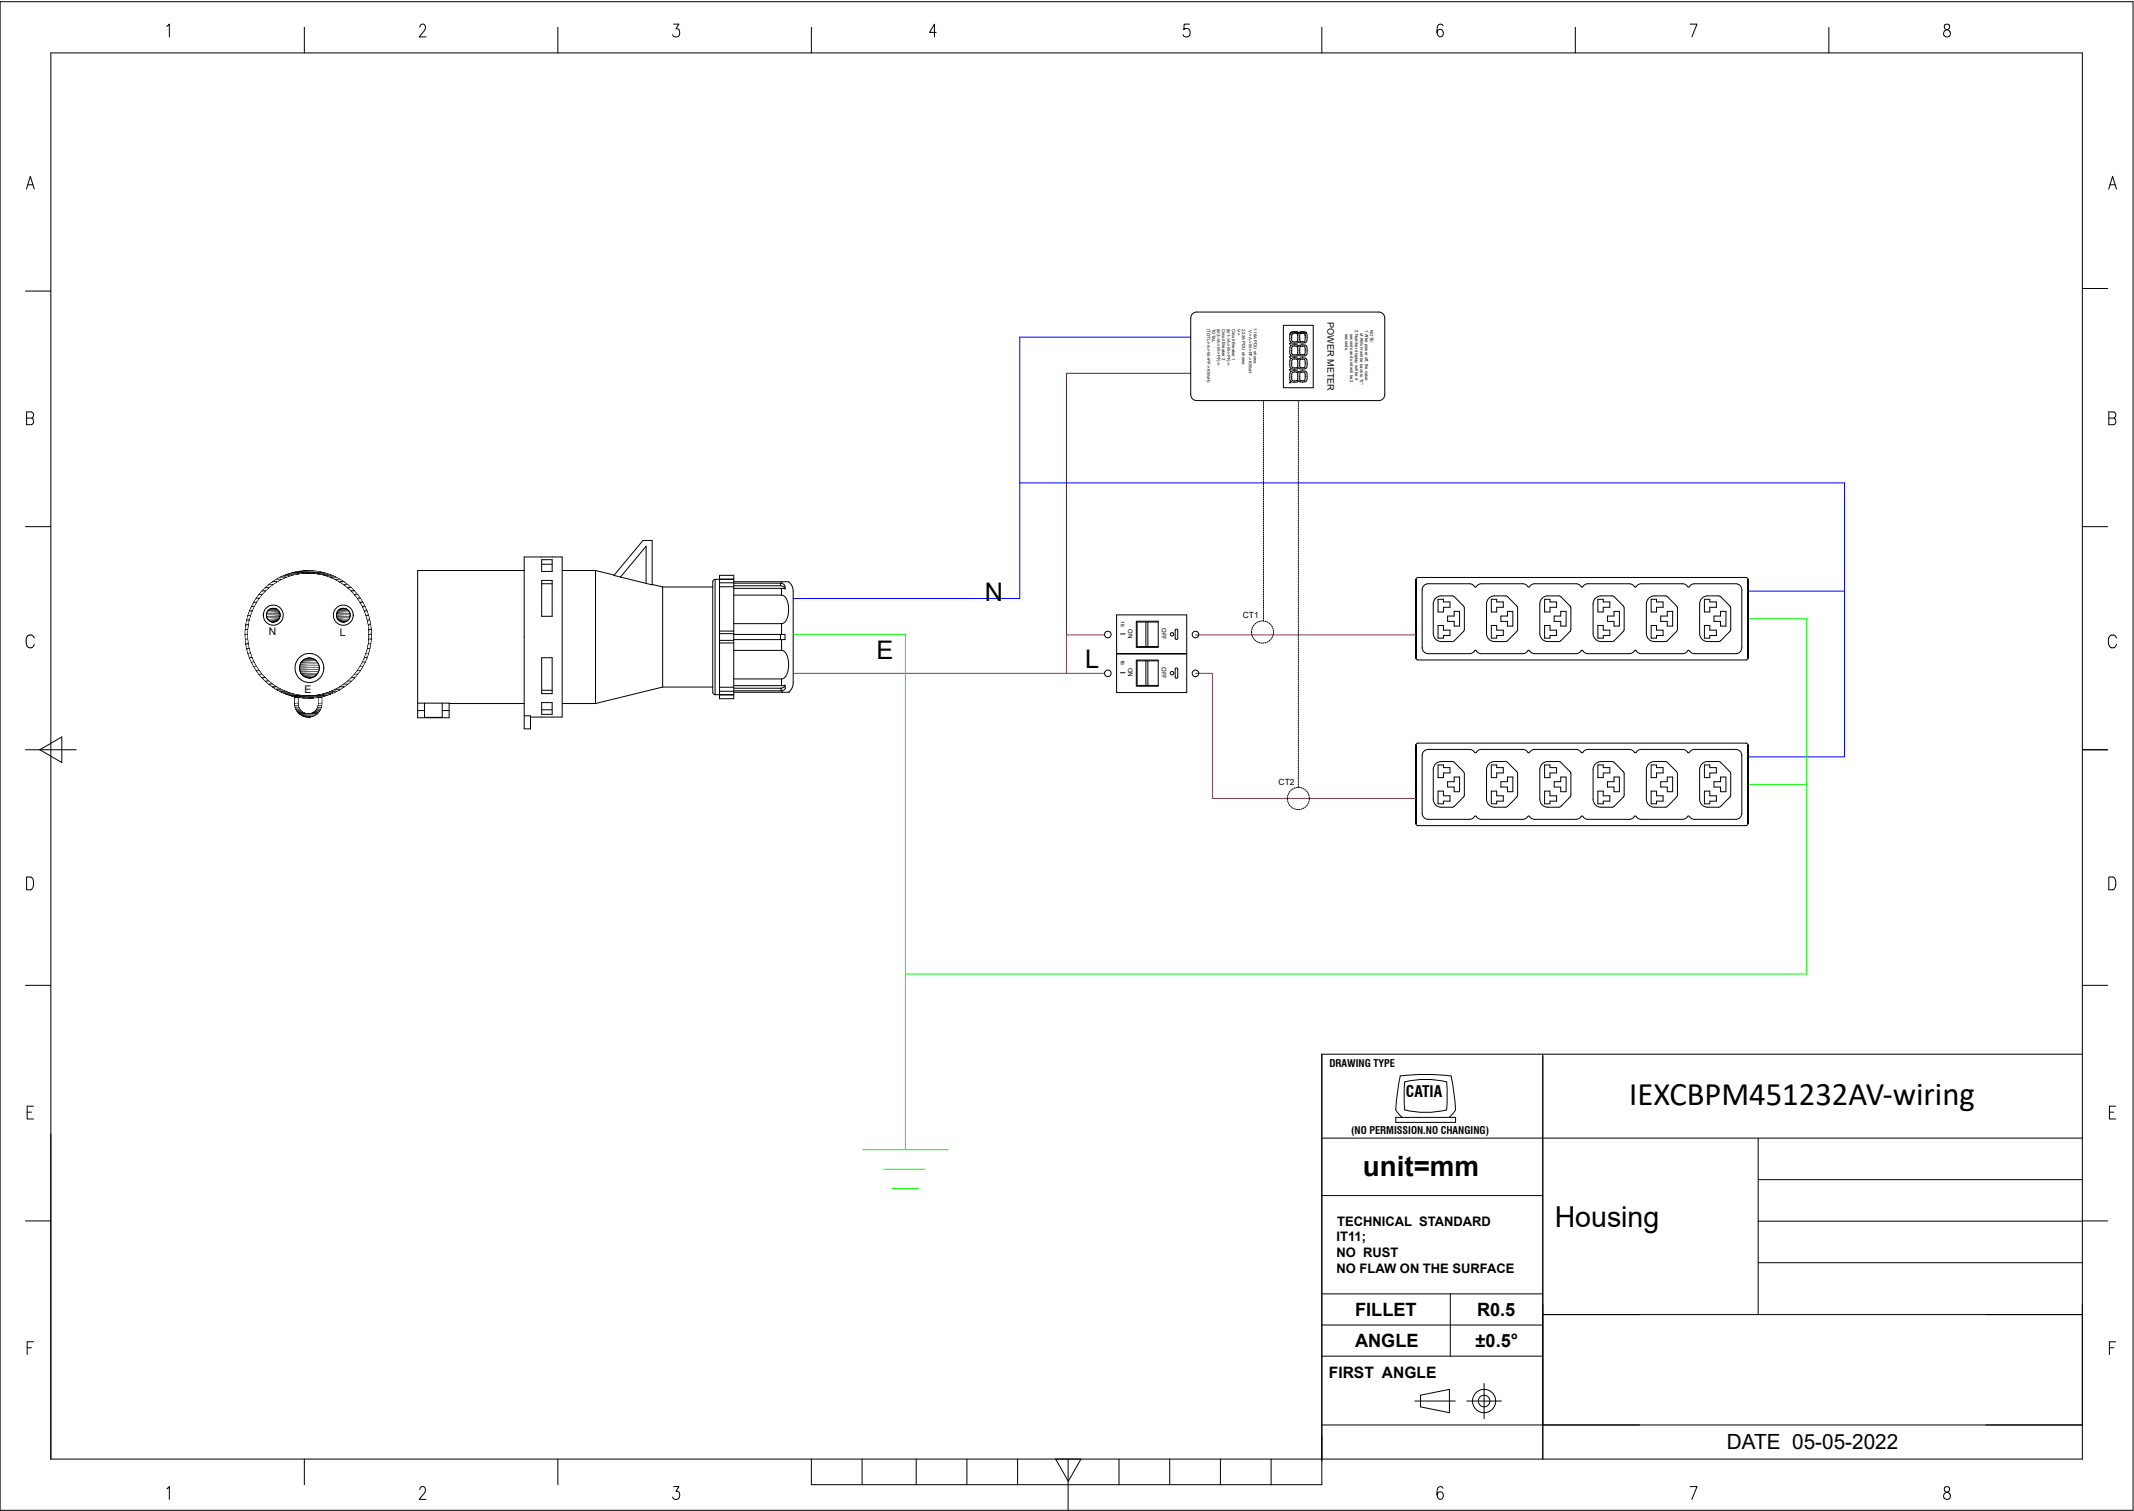


DRAWING TYPE		IEXCBPM451232AV-wiring	
 (NO PERMISSION,NO CHANGING)		Housing	
unit=mm			
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
		DATE 05-05-2022	

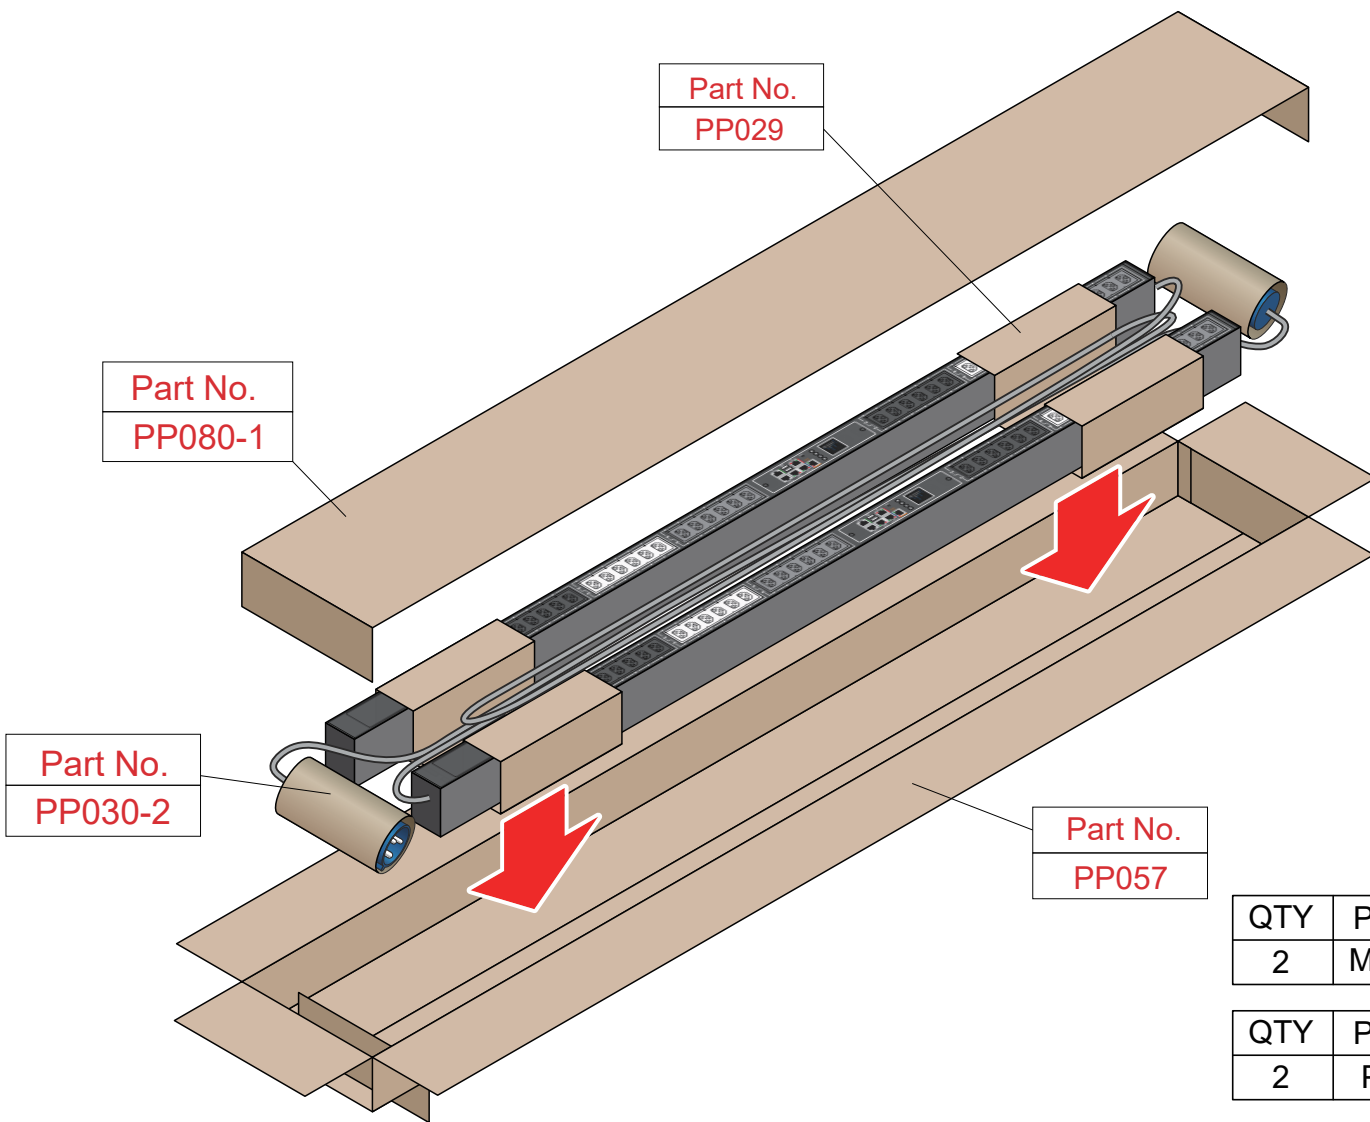


QTY	Part No.
6	IEXLOCKB
6	IEXLOCKG




QTY	Part No.
1	BO002

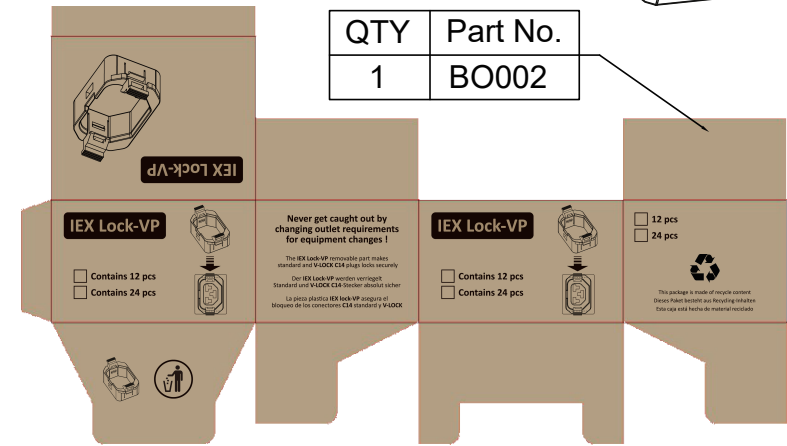

QTY	Part No.
2	MT190-1



QTY	Part No.
2	MT124-1




QTY	Part No.
2	PL178




QTY	Part No.
2	MT124-1

QTY	Part No.
2	MT190-2




QTY	Part No.
6	MT124



QTY	Part No.
2	PL178

QTY	Part No.
2	MT190-3



PK020
Section 22.5x7.2 cm Length 100 cm

Weight: 4kg(2 PDU)