

FEATURES	
Technology	PM (Power Meter)
Energy Metering	Voltage(V), Current(A), Active Power(kW), Power Factor, kWh
Metering per Input Line	Yes (Branch Circuit and Total Current) Accuracy 1.5%
Metering per Output Receptacle	No
Remote Outlet Switching	No
Ethernet Port	No
Networking Protocols	No
PDU Cascading	No
Power Share	No
Display	4 Digital-7 Segment Display LED
Residual Current Monitoring	No
USB Ports	No
Environmental Sensors	No
INPUT	
Plug	IEC 60309 1P+N+E 6h 32A 250V SINGLE PHASE
Lead Length	3 meter
Cable Type	H07RN-F3G4.0 mm ²
Max. Input Load	32A
Rated Input Voltage	190-250V Single phase
Frequency	50-60Hz
Power Capacity	7360W
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	36 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	(2) 1 Pole Carling 16A L Series L31-B0-24-616-H12-D3
CHASSIS	
Dimensions (W x D x H)	1512 x 55 x 55.4 mm
Color	RAL 9004 black powder coat
Mounting Options	4 mounting options (see page 2)
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf-cm or 22.4 in-lbs)
OPERATING ENVIRONMENT	
Temperature Range	0° to 60° C (30° to 140° F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
IEC 62368-1 (Third Edition)	
   	

A

B

C

D

E

F

A

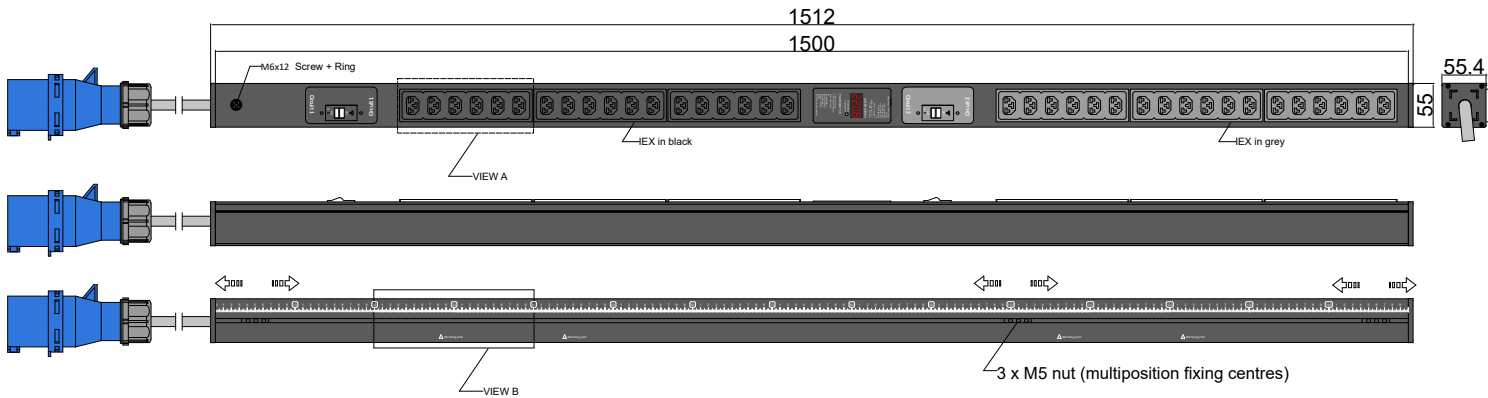
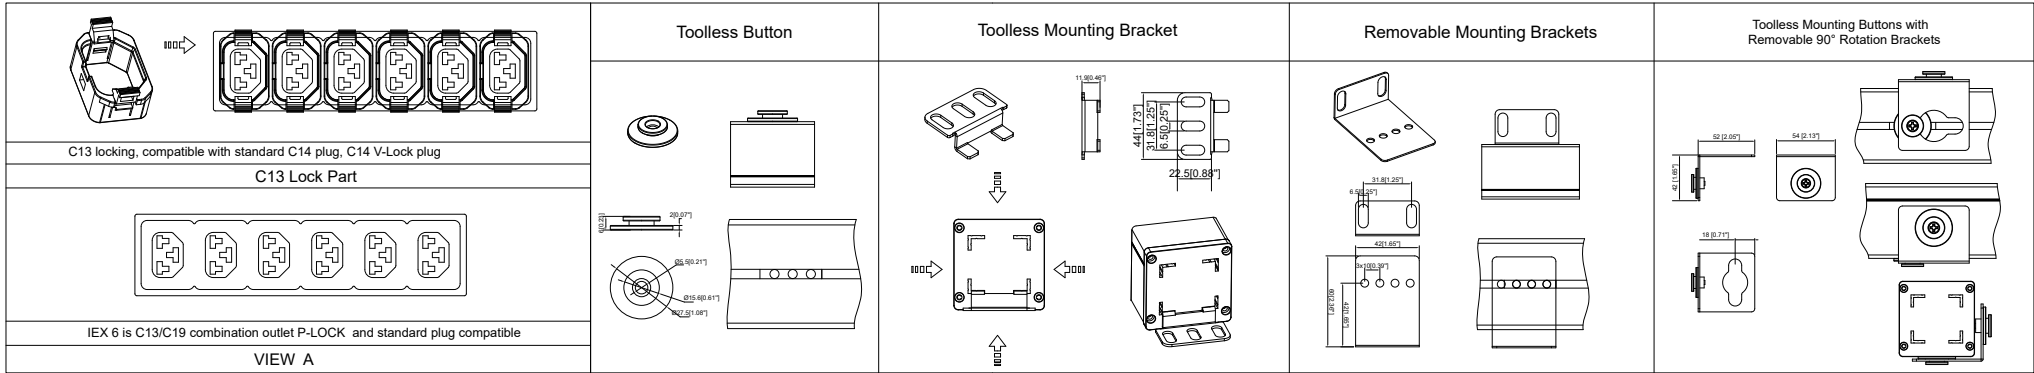
B

C


D

E

F



VIEW B:

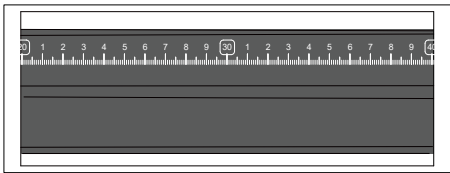

Chassis Color	Code
Black	Standard color
White	W
Red	R
Blue	A
Green	G
Orange	O
Grey	GY
Yellow	Y

Packing content:

IEX Lock-VP  X36 (black,grey)

Basic Series	OUTPUT	OPERATING TEMPERATURE
(1)Power Meter	(18) IEX (C13/C19) combo Black (Max rate 16A) (18) IEX (C13/C19) combo Grey (Max rate 16A)	0° to 60°C
INPUT	BRANCH CIRCUITS	MOUNTING ACCESSORIES
190-250VAC 32A 50HZ IEC60309 32A 1P+N+E Plug 3m H07RN-F 3G4mm ² Power Lead	(2) 1 Pole Carling 16A L Series L31-B0-24-616-H12-D3	(2) Toolless Button (2) Toolless Mounting Bracket (2) Removable Mounting Brackets (2) Toolless Mounting Buttons with Removable 90° Rotation Brackets

Revisions		
Rev	Description	Date

DRAWING TYPE		IEXCBPM453632AV	
 (NO PERMISSION.NO CHANGING)			
unit=mm		Housing	Aluminium
TECHNICAL STANDARD IT11: NO RUST NO FLAW ON THE SURFACE			Black Powder Coating
			RAL9004
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
			
		DATE 13-04-2023	

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



C14 - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓

C14PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓

C20PLOCK - C19Sleeve


H05VV-F3G1,5 mm²

Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

C20PLOCK - C13Sleeve


H05VV-F3G1 mm²

Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

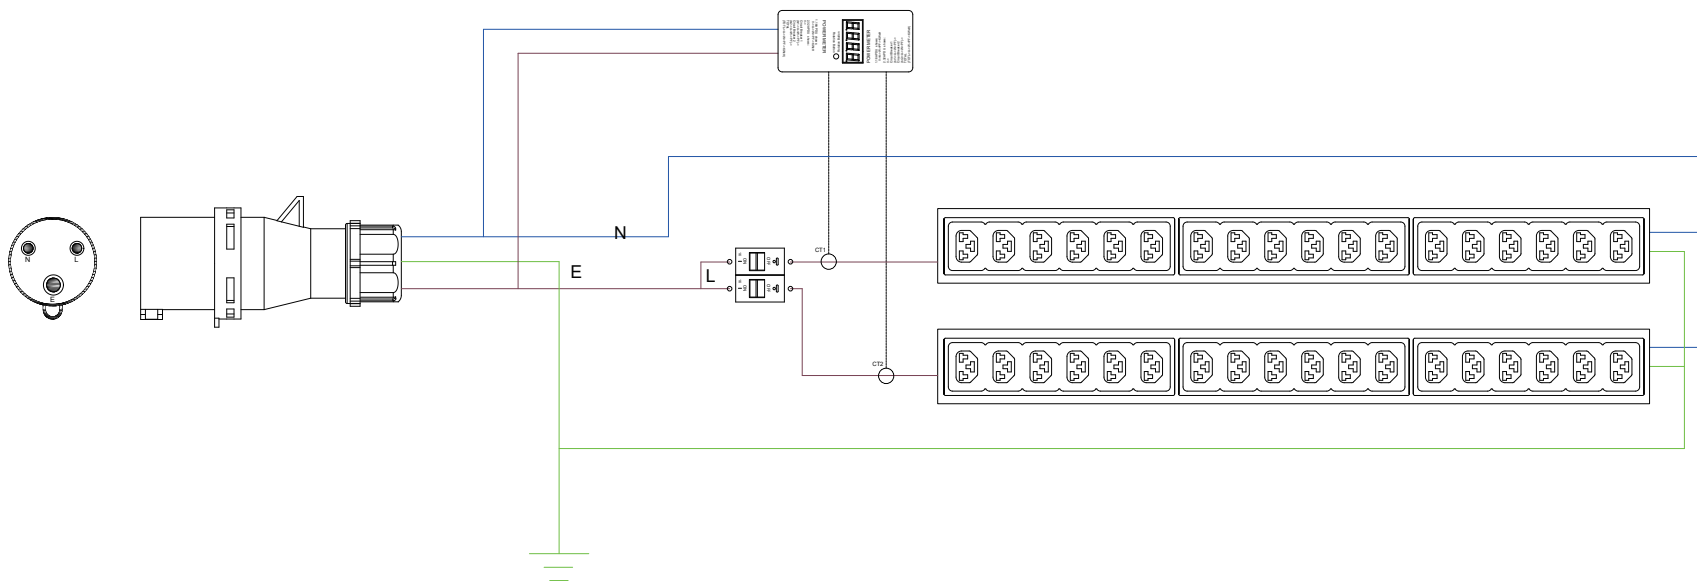


DRAWING TYPE		IEXCBPM453632AV-wiring	
 (NO PERMISSION.NO CHANGING)			
unit=mm		Housing	
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
		DATE 02-06-2021	

QTY	Part No.
18	IEXLOCKB
18	IEXLOCKG



QTY	Part No.
3	BO002

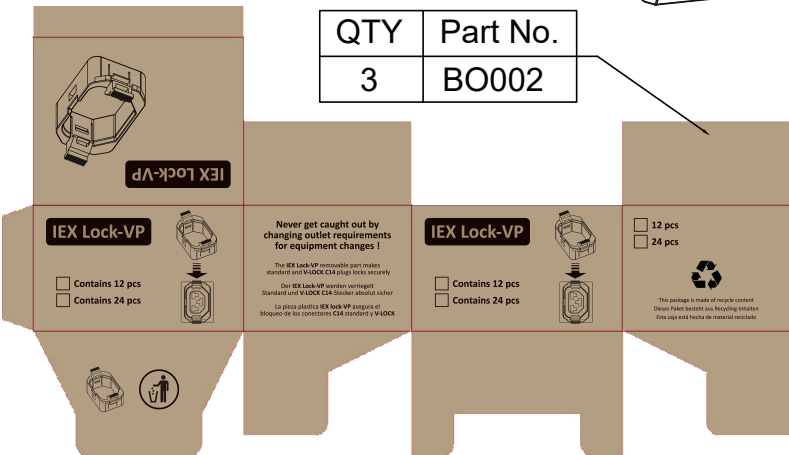


Part No.
PP029

Part No.
PP080-4

Part No.
PP030-2


Part No.
PP035

QTY	Part No.
2	MT190-1



QTY	Part No.
2	MT124-1


QTY	Part No.
2	PL178



QTY	Part No.
2	MT124-1


QTY	Part No.
2	MT190-2

QTY	Part No.
6	MT124



QTY	Part No.
2	PL178

QTY	Part No.
2	MT190-3














PK023

Section 22.5x7.2 cm Length 175 cm

Weight: 6kg(2 PDU)

IEXCBPM453632AV

图样	规格	数量		图样	规格	数量
	2.5平方蓝色软线	1				
	4 mm² 铜条	12				
	2.5平方蓝色软线	1				
					1平方棕色硬线	1
	2.5平方黄绿软线	1			1平方蓝色硬线	1
	2.5平方黄绿软线	1				
	2.5平方棕色软线	2			棕色套管	4
	2.5平方棕色软线	1			4平方黄绿软线	1
	2.5平方棕色软线	1			绿色套管	4
	蓝色套管	4				
图样			规格	数量	型号	备注
			PD046-2	1		
			PD046-7	1		