


IEXCBPM601232A3PH

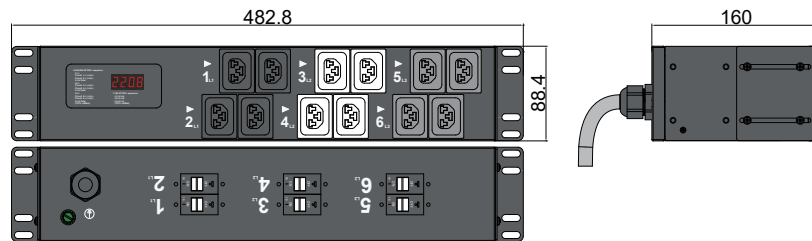

FEATURES

Technology	PM (Power Meter)
Energy Metering	Voltage(V), Current(A), Active Power(kW), Power Factor, kWh
Metering per Input Line	Yes (Branch Circuit and Total Current) Accuracy 1%
Metering per Output Receptacle	No
Remote Outlet Switching	No
Ethernet Port	No
Networking Protocols	No
PDU Cascading	No
Power Share	No
Display	4 Digital-7 Segment Display LED
Residual Current Monitoring	No
USB Ports	No
Environmental Sensors	No

INPUT

Plug	IEC60309 3P+N+E 6h 32A 380-415V
Lead Length	3 meter
Cable Type	H07RN-F5G4.0 mm ²
Max. Input Load	32A
Rated Input Voltage	380-415V three phase
Frequency	50-60Hz
Power Capacity	22.1kW

OUTPUT

Rated Output Voltage	190-250V Single phase
Output Types	12 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	(6) 1 Pole Carling 16A L Series L31-B0-24-616-H12-D3

CHASSIS

Dimensions (W x D x H)	482.8 x 88.4 x 160 mm
Color	RAL 9004 black powder coat
Mounting Options	(2) Metal Bracket
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf-cm or 22.4 in-lbs)

OPERATING ENVIRONMENT


Temperature Range	0° to 60° C (30° to 140° F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters

CONFORMANCE

IEC 62368-1 (Third Edition)




VIEW A:



C13 locking, compatible with standard C14 plug, C14 V-Lock plug
IEX LOCK-VP





Packing content:

IEX Lock-VP



X12 (black,white,grey)

Chassis Color	Code
Black	Standard color
White	W
Red	R
Blue	A
Green	G
Orange	O
Grey	GY
Yellow	Y

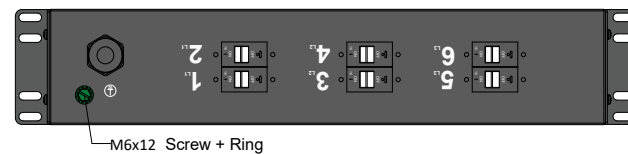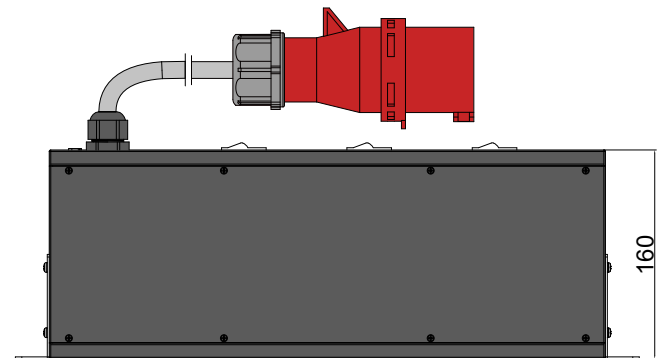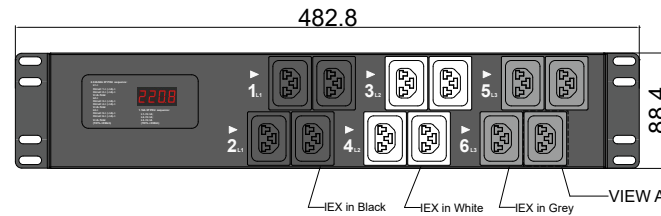

PIML Lite Series (1)Power Meter	OUTPUT (4) IEX (C13/C19) combo Black (Max rate 16A) (4) IEX (C13/C19) combo White (Max rate 16A) (4) IEX (C13/C19) combo Grey (Max rate 16A)	OPERATING TEMPERATURE 0° to 60°C	Revisions <table><tr><th>Rev</th><th>Description</th><th>Date</th></tr><tr><td></td><td></td><td></td></tr></table>			Rev	Description	Date				(NO PERMISSION.NO CHANGING) unit=mm		Housing	SECC Panel T=1.2mm
						Rev	Description	Date							
						TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE		Black Powder Coating							
		RAL9004													
INPUT 380-415VAC 32A 50HZ IEC60309 32A 3P+N+E Plug 3m H07RN-F5G4mm² Power Lead	BRANCH CIRCUITS (6) 1 Pole Carling 16A L Series L31-B0-24-616-H12-D3	MOUNTING ACCESORIES (2) Metal bracket				FILLET R0.5									
			ANGLE ±0.5°												
			FIRST ANGLE 												
								DATE 07-08-2023							

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



C14 - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C14PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C20PLOCK - C19 Sleeve

H05VV-F3G1,5 mm²




Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓



C20PLOCK - C13 Sleeve


H05VV-F3G1 mm²

Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

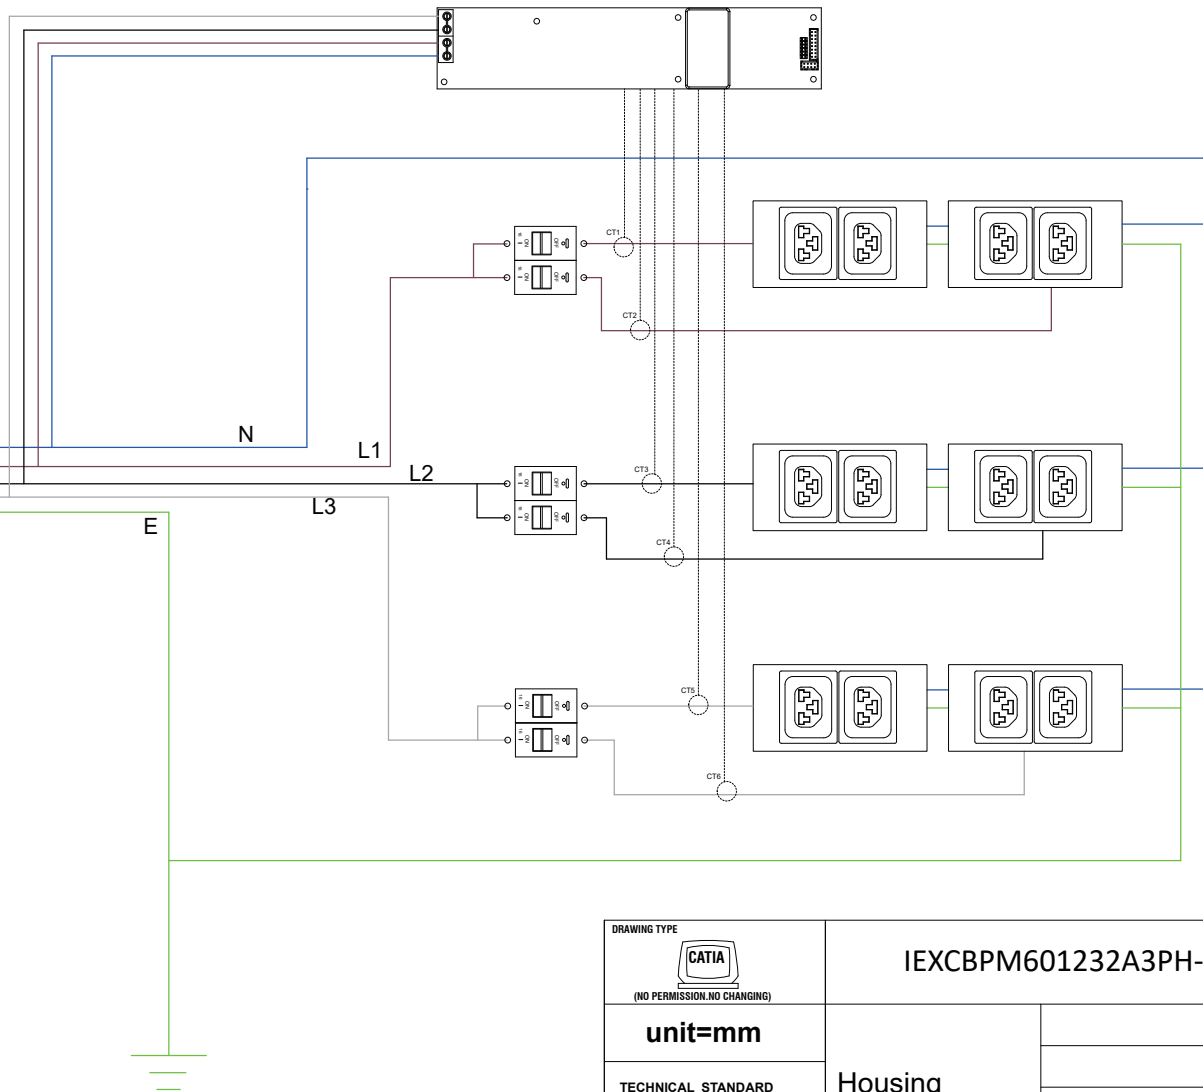


DRAWING TYPE		IEXCBPM601232A3PH-wiring	
CATIA (NO PERMISSION.NO CHANGING)			
unit=mm		Housing	
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
		DATE 17-08-2022	

QTY	Part No.
4	IEXLOCKB
4	IEXLOCKW
4	IEXLOCKG



QTY	Part No.
1	BO002

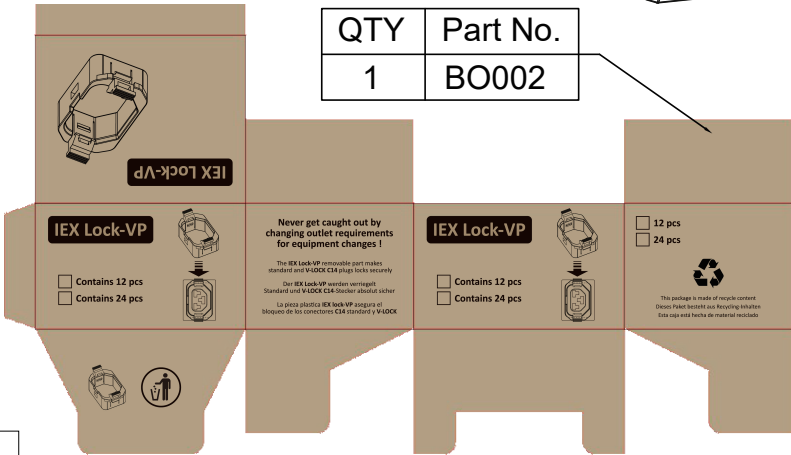

Part N.o
PP081-15


Part N.o
CB040-2

Part N.o
PP030-8

Part No.
PP030-4

QTY	Part No.
2	Metal Bracket

QTY	Part No.
8	MT066

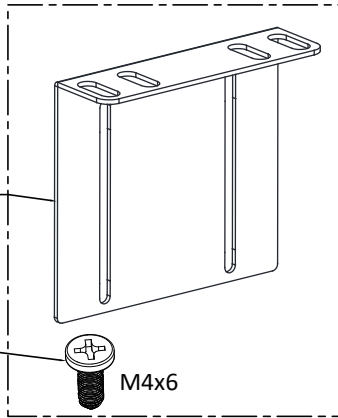

CB040-2

Section 44x36.5x11 cm

Weight: 6kg(1 PDU)