


IEXCBPOM602432AH



FEATURES	
Technology	POM (Per Outlet Metering)
Energy Metering	Voltage(V), Current(A), Active Power(W), Apparent Power (VA), Reactive Power (var), PF, Frequency(Hz), kWh
Metering per Input Line	Yes (Branch Circuit and Total Current) Accuracy 1%
Metering per Output Receptacle	Yes
Remote Outlet Switching	No
Ethernet Port	2 Gigabit Ethernet ports to acces the PDU from 2 different networks
Networking Protocols	DHCP, IPv4 and IPv6, DNS, http / https, SSHv.2, SNMP v1 / v2c / v3, SNMP TRAPS / SETS / GETS, SMTP, Modbus , TCP, RADIUS, Syslog, TLS 1.3, SNTp, ARP, ICMP, ICMPv6, UDP, NDP
PDU Cascading	16 PDUs
Power Share	Yes
Network Controller	Replaceable Hot Swapable controller with 4 button OLED display
Residual Current Monitoring	No
Rack Acces Control	Compatible with DCIM solutions
USB Ports	2 USB A ports WiFi networking,webcam,PDU configuration and mobile interface
Environmental Sensors	All in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration sensor) plug and play bus allows to connect 8 EMD devices in one PDU
INPUT	
Plug	IEC 60309 1P+N+E 6h 32A 250V SINGLE PHASE
Lead Length	3 meter
Cable Type	H07RN-F3G4.0 mm²
Max. Input Load	32A
Rated Input Voltage	190-250V Single phase
Frequency	50-60Hz
Power Capacity	7360W
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	24 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	(2) 1 Pole Carling 16A L Series L31-B0-24-616-H12-D3
CHASSIS	
Dimensions (W x D x H)	482.8 x 88.4 x 220 mm
Color	RAL 9004 black powder coat
Mounting Options	(2) Metal Bracket
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf·cm or 22.4 in-lbs)
OPERATING ENVIRONMENT	
Temperature Range	0º to 60º C (30º to 140º F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
IEC 62368-1 (Third Edition)	
   	

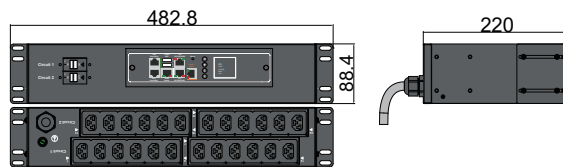
 

C13 locking, compatible with standard C14 plug, C14 V-Lock plug

IEX LOCK-VP


The front panel of the HP DesignJet Z6800 plotter features a variety of ports and a control interface. On the left, there are two RJ45 Ethernet ports labeled 'RJ45 Networking', two USB-A ports labeled 'USB-A 1/2', and two FireWire ports labeled 'FireWire 8080'. In the center, there are two FireWire ports labeled 'FireWire 8080', two USB-A ports labeled 'USB-A 1/2', and two FireWire ports labeled 'FireWire 8080'. On the right, there is a 'Reset' button, a power button, and a control panel with a display screen showing 'A3', '4.00', '219.2', '100% 300', and '100'. Below the display are four buttons: 'Back', 'Home', 'Cancel', and 'Print'.

Chassis Color	Code
Black	Standard color
White	W
Red	R
Blue	A
Green	G
Orange	O
Grey	GY
Yellow	Y

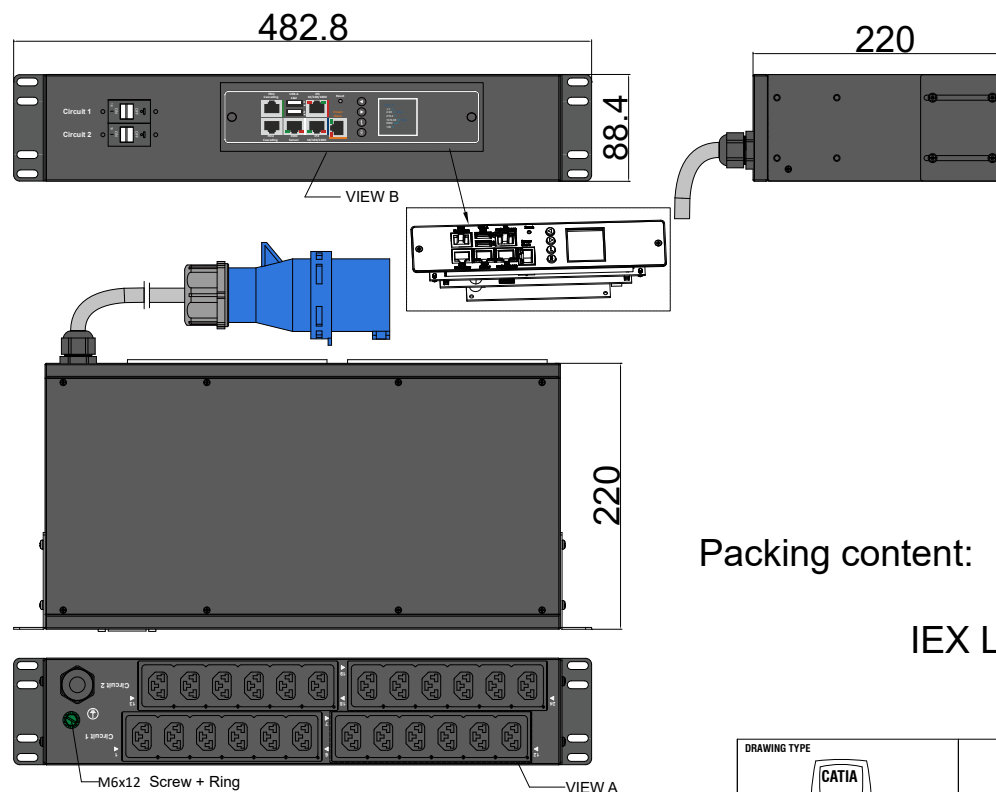

Packing content:

IEX Lock-VP



X24 Black

POM Series Inlet Power Monitoring Per Outlet Monitoring Environmental Monitoring	OUTPUT (24) IEX (C13/C19) combo Black (Max rate 16A)	OPERATING TEMPERATURE 0° to 60°C				(NO PERMISSION.NO CHANGING)		Housing	SECC Panel T=1.2mm	
						unit=mm			Black Powder Coating	
						TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			RAL9004	
INPUT 190-250VAC 32A 50HZ IEC60309 32A 1P+N+E Plug 3m H07RN-F3G4.0mm² Power Lead	BRANCH CIRCUITS (2) 1 Pole Carling 16A L Series L31-B0-24-616-H12-D3	MOUNTING ACCESORIES (2) Metal bracket	Revisions							
			Rev	Description	Date					
					(NO PERMISSION.NO CHANGING)					
					unit=mm					
					TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE					
					FILLET		R0.5			
					ANGLE		±0.5°			
					FIRST ANGLE					
									DATE 08-08-2023	

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



C14 - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C14PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C20PLOCK - C19 Sleeve

H05VV-F3G1,5 mm²


Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓



C20PLOCK - C13 Sleeve


H05VV-F3G1 mm²

Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

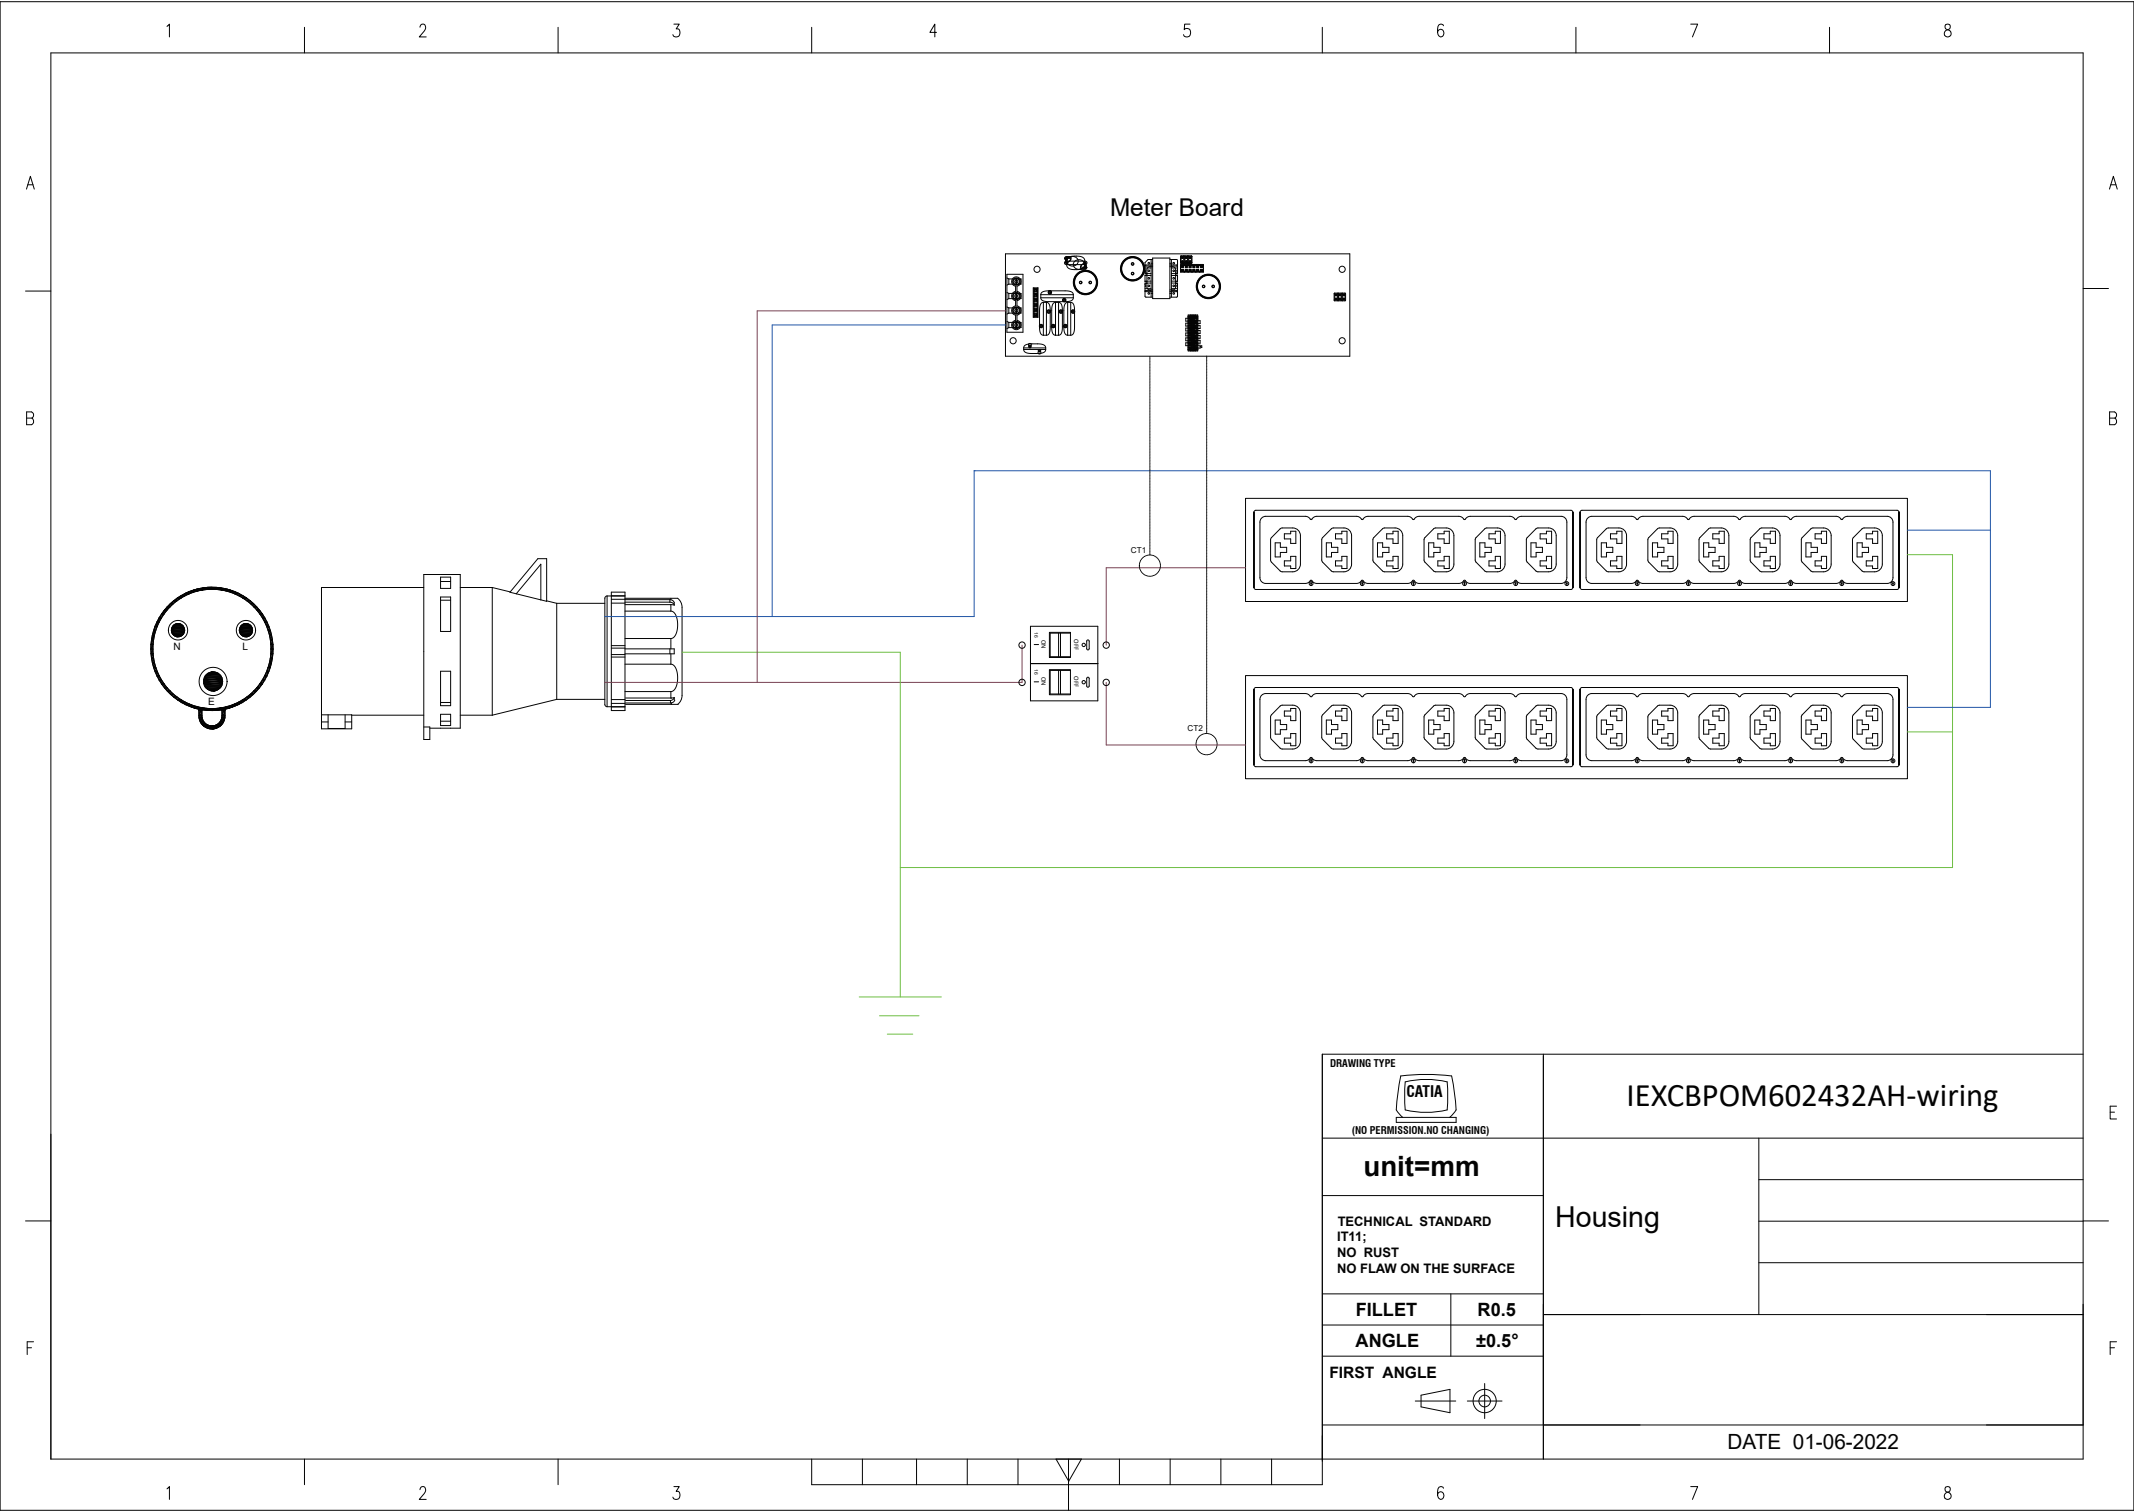


DRAWING TYPE		IEXCBPOM602432AH-wiring	
 (NO PERMISSION.NO CHANGING)			
unit=mm		Housing	
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
			
		DATE 01-06-2022	


QTY	Part No.
24	IEXLOCKB




QTY	Part No.
2	BO002

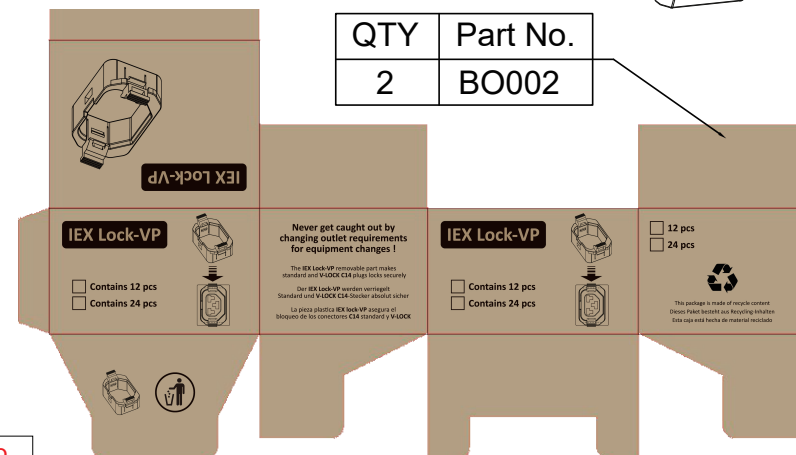


Part N.o
PP081-16

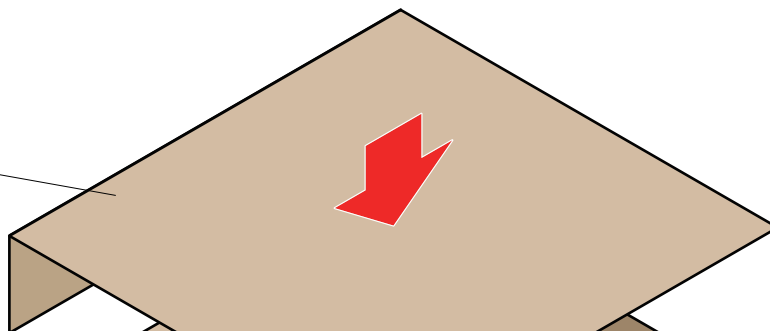


Part N.o
CB040-3

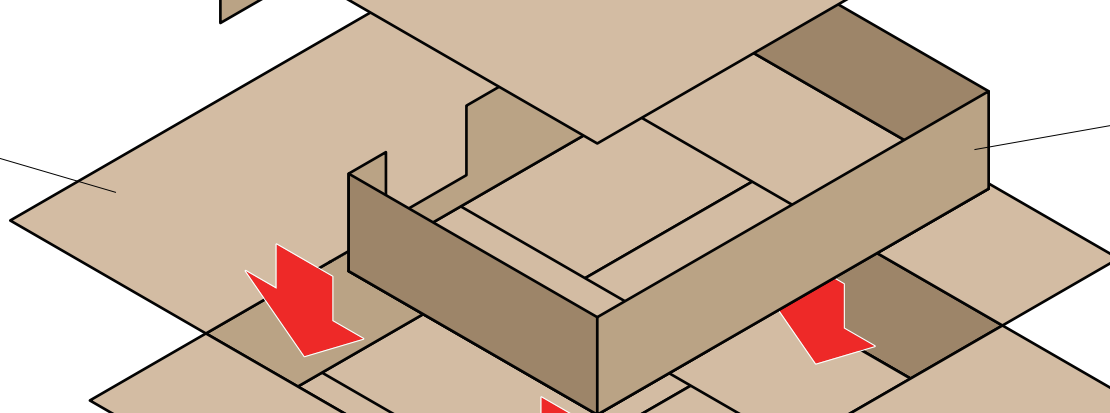


Part N.o
PP030-9

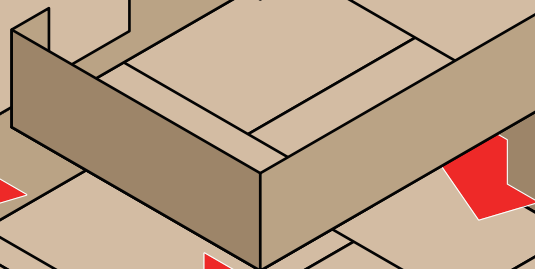

Part No.
PP030-2



QTY	Part No.
2	Metal Bracket




QTY	Part No.
8	MT066



M4x6

QTY	Part No.
1	PD090-3

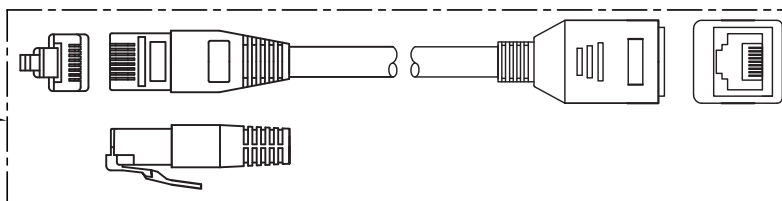

CB040-3

Section 44x42.5x11 cm

Weight: 7kg(1 PDU)