



IEXPM601216A3PH

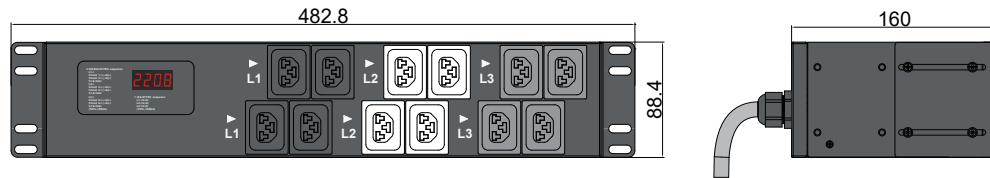

FEATURES	
Technology	PM (Power Meter)
Energy Metering	Voltage(V), Current(A), Active Power(kW), Power Factor, kWh
Metering per Input Line	Yes (Branch Circuit and Total Current) Accuracy 1%
Metering per Output Receptacle	No
Remote Outlet Switching	No
Ethernet Port	No
Networking Protocols	No
PDU Cascading	No
Power Share	No
Display	4 Digital-7 Segment Display LED
Residual Current Monitoring	No
USB Ports	No
Environmental Sensors	No
INPUT	
Plug	IEC60309 3P+N+E 6h 16A 380-415V
Lead Length	3 meter
Cable Type	H07RN-F5G2.5 mm ²
Max. Input Load	16A
Rated Input Voltage	380-415V three phase
Frequency	50-60Hz
Power Capacity	11kW
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	12 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	None
CHASSIS	
Dimensions (W x D x H)	482.8 x 88.4 x 160 mm
Color	RAL 9004 black powder coat
Mounting Options	(2) Metal Bracket
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf-cm or 22.4 in-lbs)
OPERATING ENVIRONMENT	
Temperature Range	0° to 60° C (30° to 140° F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
IEC 62368-1 (Third Edition)	
   	


VIEW A:



C13 locking, compatible with standard C14 plug, C14 V-Lock plug
IEX LOCK-VP




Packing content:

IEX Lock-VP



X12 (black,white,grey)

Chassis Color	Code
Black	Standard color
White	W
Red	R
Blue	A
Green	G
Orange	O
Grey	GY
Yellow	Y

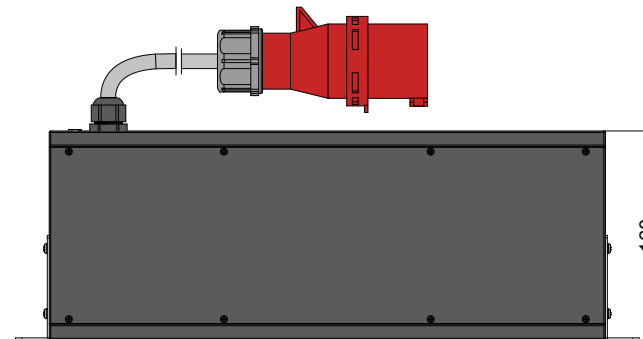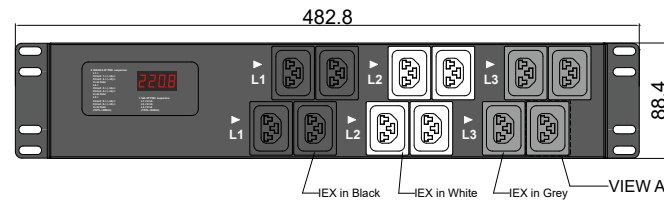

M6x12 Screw + Ring

PIM Lite Series (1)Power Meter	OUTPUT (4) IEX (C13/C19) combo Black (Max rate 16A) (4) IEX (C13/C19) combo White (Max rate 16A) (4) IEX (C13/C19) combo Grey (Max rate 16A)	OPERATING TEMPERATURE 0° to 60°C
INPUT 380-415VAC 16A 50HZ IEC60309 16A 3P+N+E Plug 3m H07RN-F5G2.5mm² Power Lead	BRANCH CIRCUITS	MOUNTING ACCESORIES (2) Metal bracket

Revisions		
Rev	Description	Date

DRAWING TYPE  (NO PERMISSION.NO CHANGING)		IEXPM601216A3PH	
unit=mm		Housing	SECC Panel T=1.2mm
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			Black Powder Coating
			RAL9004
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE 			
		DATE 07-08-2023	

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



C14 - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C14PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C20PLOCK - C19 Sleeve

H05VV-F3G1,5 mm²




Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓



C20PLOCK - C13 Sleeve


H05VV-F3G1 mm²

Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

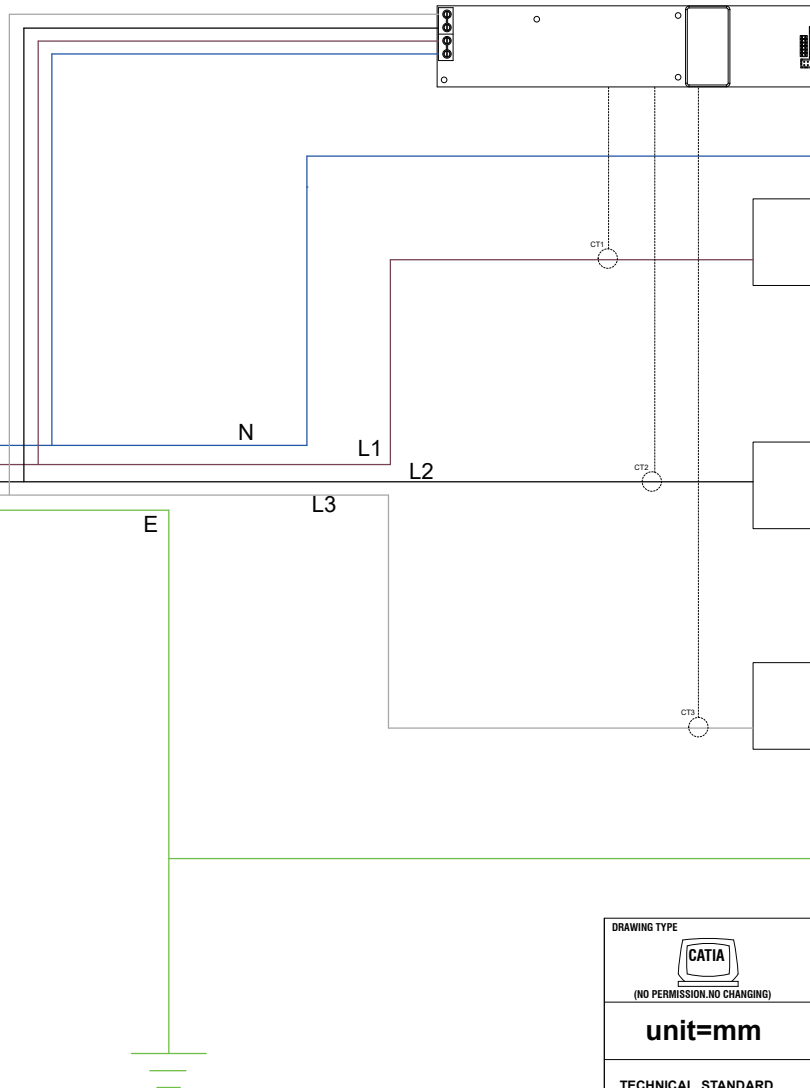


DRAWING TYPE		IEXPM601216A3PH-wiring	
 (NO PERMISSION.NO CHANGING)			
unit=mm		Housing	
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
			
		DATE 17-08-2022	

QTY	Part No.
4	IEXLOCKB
4	IEXLOCKW
4	IEXLOCKG



QTY	Part No.
1	BO002

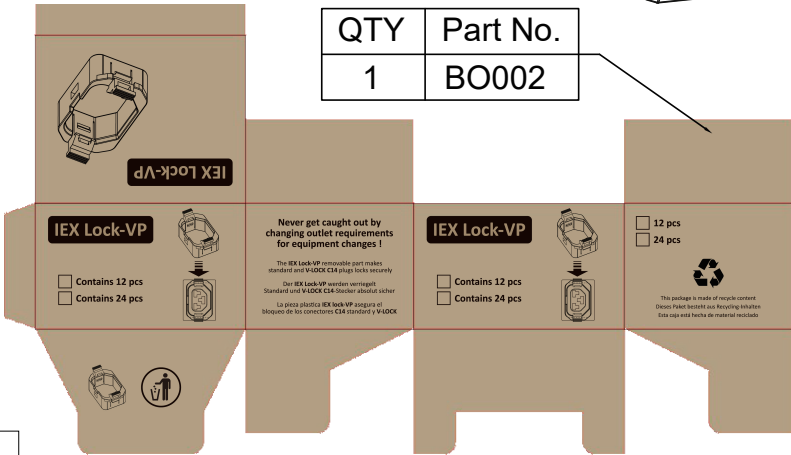

Part N.o
PP081-15


Part N.o
CB040-2

Part N.o
PP030-8

Part No.
PP030-3

QTY	Part No.
2	Metal Bracket

QTY	Part No.
8	MT066

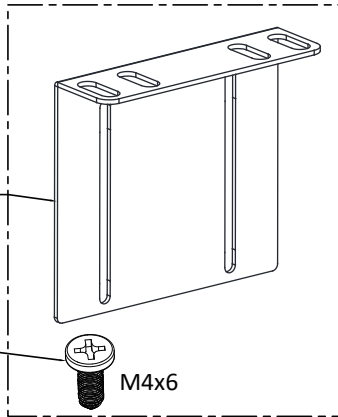

CB040-2

Section 44x36.5x11 cm

Weight: 6kg(1 PDU)